


POST SHORE - F Series MEDIUM DUTY - COVERED THREAD

PUNTALES DE METAL AJUSTABLES - Serie F SERVICIO MEDIANO - ROSCA CUBIERTA

Adjustment with pin and covered thread



Our most popular and affordable medium duty model Post Shore with covered threads, tube collar with 2 handles (ears), captured 9/16" (13mm) pin, 4.33" x 4.33" x .197" (110mm x 110mm x 5mm) end plates, painted red. Available with reinforced base.


Nuestro modelo de puntal de servicio mediano más popular y accesible, con roscas cubiertas, cuello tubular con dos agarraderas, pasador capturado de 13mm (9/16"), placas de extremo de 110mm x 110mm x 5mm (4.33" x 4.33" x .197"), pintado de rojo. Disponible con base reforzada.

ABLE

EXPORT, LLC
7475 NW 63rd Street
Miami, FL 33166-3603
Miami: (305) 593-2253
Fax: (305) 592-2793
USA WATS: 1-800-831-4564

AMERICAN SYSTEM
SISTEMA E.U.A.

METRIC SYSTEM
SISTEMA MÉTRICO

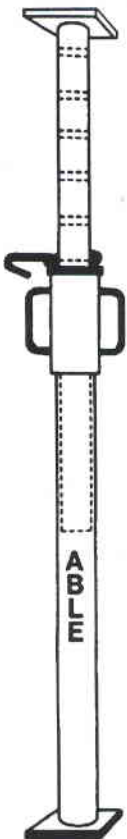

	Length/Longitud:	5'1" to/a 9'0"	1.55m to/a 2.74m
PS-1F 2,000/20' CONT. Special Order	External tube/Tubo externo: 2.20" x .079" x 4'9" Internal tube/Tubo interno: 1.89" x .079" x 5'1" Weight/Peso: 20.9 lbs./libras	2.20" x .079" x 4'9" 1.89" x .079" x 5'1" 20.9 lbs./libras	56 x 2 x 1,500mm 48 x 2 x 1,550mm 9.3kgs/kilogramos
PS-2F 1,750/20' CONT.	External tube/Tubo externo: 2.20" x .079" x 5'9" Internal tube/Tubo interno: 1.89" x .079" x 6'1" Weight/Peso: 21.7 lbs./libras	2.20" x .079" x 5'9" 1.89" x .079" x 6'1" 21.7 lbs./libras	56 x 2 x 1,800mm 48 x 2 x 1,850mm 9.7kgs/kilogramos
PS-3F 1,600/20' CONT.	External tube/Tubo externo: 2.20" x .079" x 6'6" Internal tube/Tubo interno: 1.89" x .079" x 7'2" Weight/Peso: 24.5 lbs./libras	2.20" x .079" x 6'6" 1.89" x .079" x 7'2" 24.5 lbs./libras	56 x 2 x 2,000mm 48 x 2 x 2,180mm 11.0kgs/kilogramos
PS-4F 500/20' CONT.	External tube/Tubo externo: 2.20" x .098" x 7'9" Internal tube/Tubo interno: 1.89" x .098" x 8'5" Weight/Peso: 35.2 lbs./libras	2.20" x .098" x 7'9" 1.89" x .098" x 8'5" 35.2 lbs./libras	56 x 2.5 x 2,400mm 48 x 2.5 x 2,600mm 15.9kgs/kilogramos

ALLOWABLE LOADS IN LBS:

CARGAS PERMISIBLES EN KGS:

SAFETY FACTOR = 3:1 FACTOR DE SEGURIDAD = 3:1

HEIGHT /ALTURA	5' 1.52m	6' 1.83m	7' 2.13m	8' 2.44m	9' 2.74m	10' 3.05m	11' 3.35m	12' 3.66m	13' 3.96m	14' 4.27m	15' 4.57m
PS-1F	6,200 2,812	6,200 2,812	5,500 2,495	4,800 2,177	4,100 1,860						
PS-2F		6,200 2,812	5,500 2,495	4,800 2,177	4,100 1,860	3,400 1,542	2,700 1,225				
PS-3F				4,800 2,177	4,100 1,860	3,400 1,542	2,700 1,225	2,350 1,066	2,050 930		
PS-4F						3,400 1,542	2,700 1,225	2,350 1,066	2,050 930	1,775 805	1,575 714